



TYPICAL ALUMINUM CLAMP MOUNTING



SECTION B-B
TYPICAL BOLTED CONNECTION
TO STRUCTURE SUPPORT



STAINLESS STEEL BOLT

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Donald E. Howe
REGISTERED CIVIL ENGINEER

May 31, 2018
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS
OR AGENTS SHALL NOT BE RESPONSIBLE FOR
THE ACCURACY OR COMPLETENESS OF SCANNED
COPIES OF THIS PLAN SHEET.


REGISTERED PROFESSIONAL ENGINEER
No. C46402
EXP. 3-31-19
CIVIL
STATE OF CALIFORNIA

A-1 HARDWARE QUANTITY TABLE


SIGN LENGTH	SIGN DEPTH SEE NOTE 4	UNITS REQUIRED SEE NOTE 3
15'-0" OR LESS	4'-2" - 5'-0"	4
16'-0" - 24'-0"	4'-2" - 5'-0"	6
15'-0" OR LESS	5'-10" - 10'-0"	8
16'-0" - 24'-0"	5'-10" - 10'-0"	12

NOTES:


1. Refer to applicable Standard Plan for additional mounting details.
2. Rectangular head bolt, hexagon stop nut, and flat washer shall be 5/8" diameter (18-8) stainless steel.
3. One unit of A-1 hardware shall consist of two sets of these components: clamp, bolt, nut and washer.
4. Signs 9'-2" and 10'-0" in depth may be fabricated in three panel sections to avoid legend from being placed on a horizontal seam. Increase number of units of mounting hardware accordingly.

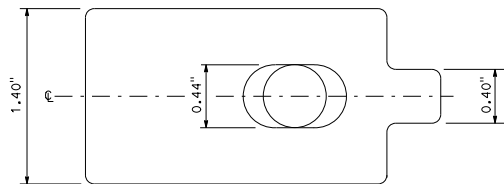

TOP VIEW

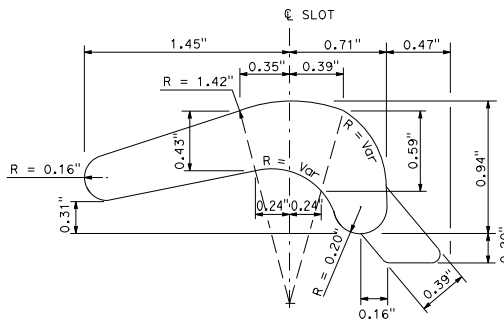

SIDE VIEW



FRONT VIEW

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**TYPE A-1 MOUNTING HARDWARE
FOR OVERHEAD LAMINATED
TYPE A PANEL
(TRUSS AND LIGHTWEIGHT
SIGN STRUCTURES)**

NO SCALE

S87